


STAINLESS STEEL CORNER GUARDS



Korogard Stainless Steel Corner Guards provide a modern and attractive appearance for corner protection. Easily installed, these guards are made of 16-gauge stainless steel with a #4 Satin finish. Ideal for medium- to high-impact areas, Stainless Steel Corner Guards are available with a standard 90° angle and 1/2" (12.7mm), 3/4" (19.1mm), 1" (25.4mm), 1-1/2" (38.1mm), 2" (50.8mm), 2-1/2" (63.5mm), 3" (76.2mm), 3-1/2" (88.9mm), or 4" (101.6mm) wing sizes. Custom angles are available. Please call your local Koroseal sales representative for more information.


Korogard Stainless Steel Corner Guards are backed by a limited five-year warranty. All corner guards are Class A fire rated and meet national building code standards. All Korogard protective products color-coordinate with a multitude of Koroseal Wallcoverings for a system approach to wall protection.

For more information on Korogard Corner Guards or the Koroseal Wall Protection System, please call your local Korogard distributor.

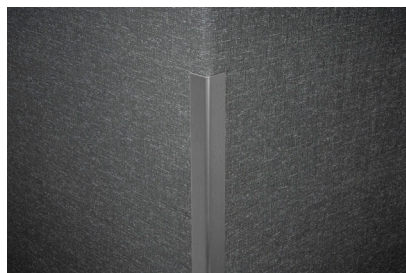


GS10

1" (25.4mm)

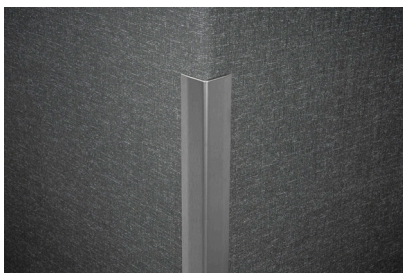


GS15

1-1/2" (38.1mm)

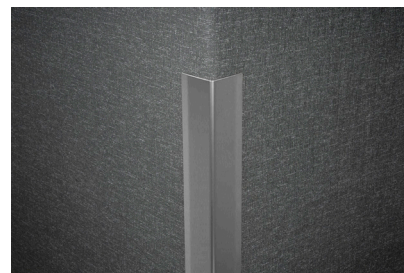


GS20

2" (50.8mm)

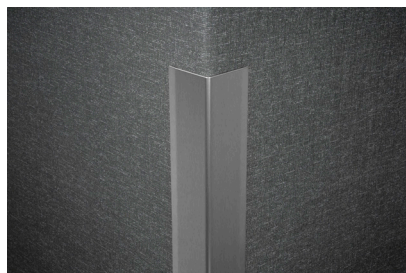


GS25

2-1/2" (63.5mm)

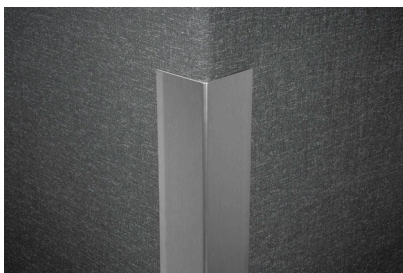


GS30

3" (76.2mm)

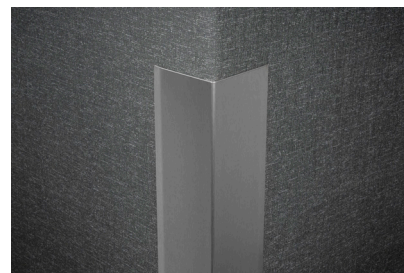

GS35

3-1/2" (88.9mm)

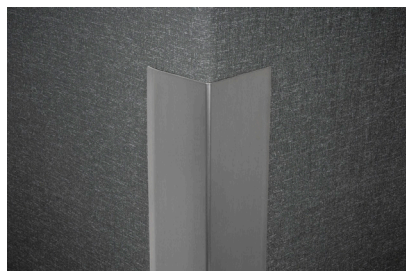

GS40

4" (101.6mm)

SECTION 10 26 00 CORNER GUARDS

PART 1 GENERAL

1.01 SECTION INCLUDES

Stainless Steel Corner Guards.

1.02 SUBMITTALS

- A. Submit in accordance with Section 01 33 00—Submittals.
- B. Product Data: Submit manufacturer's product data.
- C. Samples: Submit for approval 12" (304.8mm) long sample of each color specified.
- D. Test Reports: Submit manufacturer's test reports and certification indicating compliance with applicable building code requirements.

1.03 QUALITY ASSURANCE

Comply with specified project requirements regarding fit and finish.

1.04 DELIVERY, STORAGE, AND HANDLING

- A. Delivery: Deliver materials to site in manufacturer's original, unopened containers and packaging with labels clearly identifying product name and manufacturer.
- B. Storage: Store materials in a clean, dry location protected against damage of any kind.

PART 2 PRODUCTS

2.01 MANUFACTURER

Koroseal Wall Protection Systems,
A Division of Koroseal Interior Products, LLC.

2.02 CORNER GUARDS

Koroseal "Korogard" Series GS10, GS15, GS20, GS30, and GS35: 16-gauge Stainless Steel Corner Guard adhered or screwed to substrate corner. Exposed surfaces shall be free of discoloration or other imperfections.

1. Dimensions

- a. Leg length: 1/2" (12.7mm)—GS05; 3/4" (19.1mm)—GS75
1" (25.4mm)—GS10; 1-1/2" (38.1mm)—GS15;
2" (50.8mm)—GS20; 2-1/2" (63.5mm)—GS25;
3" (76.2mm)—GS30; 3-1/2" (88.9mm)—GS35;
and 4" (101.6mm)—GS40.

b. Angle: 90° (Custom Angle Available).

2. Material: Stainless Steel, type 304.

3. Finish: #4 Satin.

PART 3 EXECUTION

3.01 EXAMINATION

Verify by examination that wall surfaces are acceptable to receive the specified guard systems. Notify the Architect in writing if wall surfaces are not acceptable. Do not begin installation until unacceptable conditions have been corrected.

3.02 INSTALLATION

- A. Install corner guards to wall securely using mastic construction adhesive or appropriate screws, as specified.
- B. Install corner guards accurately in location, alignment, and elevation.