


## RUB STRIPS

Korogard Rub Strips provide protection against damage from chairs, gurneys, and other abuse. Korogard Rub Strips are typically used in waiting rooms, high-traffic corridors, or equipment storage areas. Korogard Rub Strips are available in all standard Korogard colors and thicknesses, in 4" (101.6mm) to 12" (304.8mm) widths and lengths up to and including 96" (2.43m).

Korogard Rub Strips are backed by a limited five-year warranty. They are chemical- and stain-resistant to prevent discoloration and surface damage. Korogard Rub Strips are fire rated for Surface Burning Characteristics as classified by Underwriters Laboratories, Inc. and meet national building code standards.

For more information on Korogard Rub Strips, please call your local Korogard distributor.

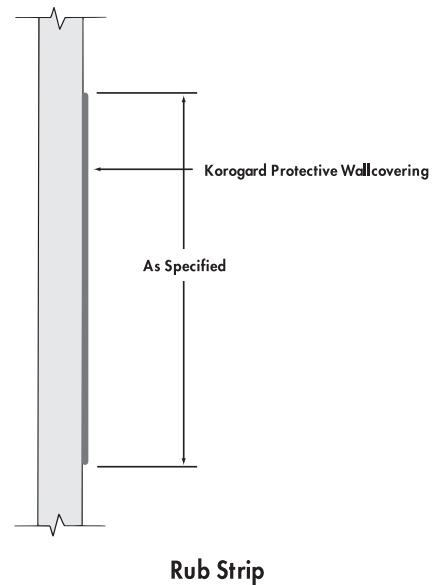

## SECTION 10 26 00 WALL COVERING

### PART 1 GENERAL

#### 1.01 SECTION INCLUDES

Protective Rub Strips.

#### 1.02 SUBMITTALS

- A. Comply with requirements of Section 01 33 00 – Submittals.
- B. Product Data: Submit manufacturer's product data including installation instructions.
- C. Samples: Submit 7" (177.8mm) x 9" (228.6mm) sample of each type, thickness, color, and texture to be installed for Architect's approval.
- D. Certification: Submit manufacturer's certification indicating Protective Wallcovering meets specified requirements.
- E. Maintenance Instructions: Submit manufacturer's maintenance instructions for Protective Wallcovering.

#### 1.03 QUALITY ASSURANCE

Installer Qualifications: Use installer experienced in the installation of Protective Rub Strips on projects of similar size and complexity.

#### 1.04 DELIVERY, STORAGE, AND HANDLING

- A. Delivery: Deliver materials to site in manufacturer's original, unopened containers and packaging with labels clearly indicating manufacturer and material.
- B. Storage:
  1. Store materials indoors in a clean, dry area protected from damage and in accordance with manufacturer's instructions.
  2. Maintain storage temperature above 50°F (10°C).
  3. Store materials flat. Do not stand rolls or sheet on end.
- C. Handling: Protect materials during handling and installation to prevent damage.

#### 1.05 ENVIRONMENTAL REQUIREMENTS

- A. Maintain constant minimum air temperature of 65°F (18°C) for a minimum of 48 hours before and during installation.
- B. Maintain wall temperature between 65°F (18°C) and 85°F (29°C) during installation.
- C. Do not expose walls to direct sunlight during or after installation.
- D. Do not install if relative humidity is greater than 80%.

### PART 2 PRODUCTS

#### 2.01 MANUFACTURER

Koroseal Wall Protection Systems, A Division of Koroseal Interior Products.

#### 2.02 PROTECTIVE WALLCOVERING

Koroseal "Korogard" Protective Rub Strips:  
Rigid high-impact sheet.

1. Fire Rating: [Class A] [Class B] [Class C].
2. Thickness: [0.040" (1.02mm)] [0.060" (1.52mm)].
3. Height: [4" (101.6mm)][6" (152.4mm)][8" (203.2mm)] [12" (304.8mm)].
4. Edges: [Square] [Beveled].
5. Backing: [Adhesive backing] [Unbacked].
6. Color: Color to be selected by Architect from manufacturer's standard colors.

#### 2.03 ADHESIVES

Furnish adhesives approved by Protective Rub Strip manufacturer.

#### 2.04 ACCESSORIES

- A. Accessory Moldings: Furnish accessory moldings by Protective Rub Strip manufacturer to ensure accurate match of colors, dimensions, and physical properties.
- B. Caulk: Furnish color-matched caulk by Protective Rub Strip manufacturer to ensure accurate match of colors.

### PART 3 EXECUTION

#### 3.01 EXAMINATION

Inspect wall surfaces to receive Protective Rub Strip. Notify the Architect in writing if wall surfaces are not acceptable. Do not begin installation until unacceptable conditions have been corrected.

#### 3.02 SURFACE PREPARATION

- A. Prepare walls in accordance with manufacturer's written instructions.
- B. Remove dust, dirt, grease, oil, loose paint, scale, and existing wallcovering.
- c Resurface uneven wall surfaces and damaged walls.

#### 3.03 INSTALLATION

- A. Install Protective Rub Strip to walls in accordance with manufacturer's written instructions.
- B. Allow Protective Rub Strip and adhesive to precondition for a minimum of 24 hours at a temperature between 65°F (18°C) and 85°F (29°C) before installation .
- C. Install strips with texture running in the same direction for uniform appearance.

#### 3.04 CLEANING

- A. Clean Protective Rub Strip in accordance with manufacturer's instructions.
- B. Remove excess adhesive and layout marks.