

C600-SERIES CRASH RAILS




Korogard C600-Series Crash Rails are 6" (152.4mm) high with full-length vinyl cushions and continuous aluminum retainers. C600-Series Crash Rails combine a wide area of protection and a variety of mounting options to meet every impact need. Korogard rugged durability makes C600-Series Crash Rails best suited for medium- to high-impact areas. The C600 is available as C60E, a Korogard ETS product manufactured with a unique blend of high-performance materials. The C600 can also be specified as C60F, which has a wood grain finish with faux wood-wrapped ends. The C60F rail is available in your choice of nine wood grain finishes including: American Natural, Rigo Birch, Honey Maple, Red Alder, Auburn, Pear, Shaker Cherry, Rustic Cherry, Chocolate Pear, and Summer Flame. A Brushed Aluminum finish is also available for the C60F.

Korogard C600-Series Crash Rails are backed by a limited five-year warranty. All Crash Rails are Class A fire rated and meet national building code standards. All Korogard linear profiles color-coordinate with a multitude of Koroseal Wallcoverings for a systems approach to wall protection.


For more information on Korogard Crash Rails or the Koroseal Wall Protection System, please call your local Korogard distributor.

C600 SERIES ACCESSORY ITEMS


C601	End Cap (Foam Cushion)
C603	90° Outside Corner Cap (Foam Cushion)
C605	Splice Kit
C621	Rigid End Cap (Plastic)
C623	90° Rigid Corner Cap (Plastic)
C624	135° Rigid Corner Cap (Plastic)
C641	Extended End Cap

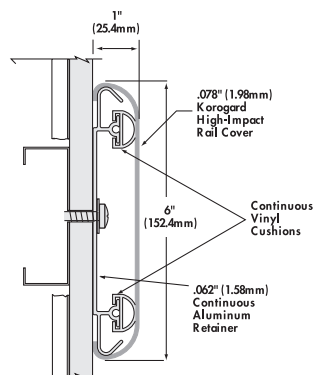

C600/C60E/C60F

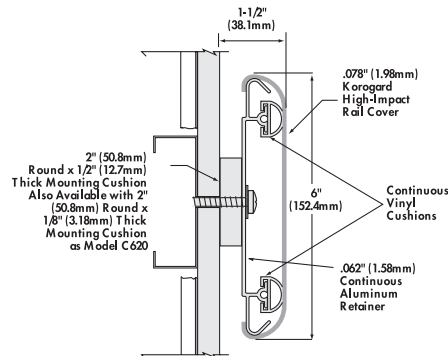

C630

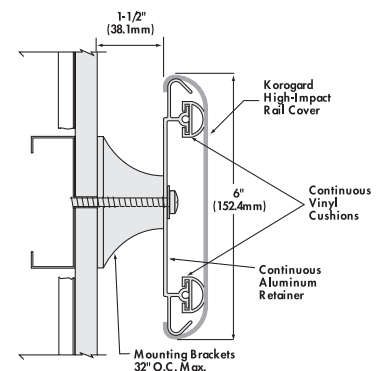

C640

SECTION 10 26 00 CRASH RAILS

PART 1 GENERAL

1.01 SECTION INCLUDES

- 6" (152.4mm) Crash Rails.

1.02 SUBMITTALS

- A. Comply with requirements of Section 01 33 00—Submittals.
- B. Product Data: Submit manufacturer's product data.
- C. Shop Drawings: Submit shop drawings showing components, dimensions, and anchorage details.
- D. Samples: Submit 12" (304.8mm) long sample of each model and color specified, including end caps and corner units for Architect's approval.
- E. Certification: Submit manufacturer's certification indicating compliance with applicable building code requirements.

1.03 QUALITY ASSURANCE

- Comply with NFPA 101[®] for interior finish materials. Smoke developed less than 450 and flame spread of 25 or less in accordance with ASTM E 84.

1.04 DELIVERY, STORAGE, AND HANDLING

- A. Delivery: Deliver materials to site in manufacturer's original, unopened containers and packaging with labels clearly indicating manufacturer and material.
- B. Storage: Store materials indoors in a clean, dry area protected from damage and in accordance with manufacturer's instructions.
- C. Handling: Protect materials during handling and installation to prevent damage.

PART 2 PRODUCTS

2.01 MANUFACTURER

- Koroseal Wall Protection Systems,
A Division of RJF International Corporation.

2.02 CRASH RAILS

Koroseal "Korogard" C600-Series Crash Rail: Crash Rail mounted over continuous aluminum retainer and two continuous vinyl bumper cushions. Exposed surfaces shall be free of wrinkling, chipping, discoloration, or other imperfections.

1. Dimensions:

- a. Height: 6" (152.4mm).
- b. Width: 1" (25.4mm).
- c. Clearance from Wall: [Model C600, flush with wall] [Model C620, 1/8" (3.18mm)] [Model C630, 1/2" (12.7mm)].
- 2. Profile: High-impact vinyl acrylic extrusion locked in place, nominal 0.078" (1.98mm) thick. Class A fire rating, tested in accordance with ASTM E 84.
- 3. Extrusion: C600: Pebble grain finish; C60F: Smooth finish. Contains EPA registered Micro-Chek antimicrobial agent.
- 4. Retainer: Nominal 0.062" (1.57mm) thick 6063-T5 aluminum.
- 5. End Caps: Solid, one-piece foam cushion wall return unit. Withstand impacts of 161 foot-pounds without splitting, cracking, shattering, or breaking.
- 6. Corners: External corner units of similar material to end cap units. Carry line of Crash Rail continuously around corner, unless otherwise indicated on drawings.
- 7. Color: Color to be selected by Architect from manufacturer's standard colors.

PART 3 EXECUTION

3.01 EXAMINATION

Inspect wall surfaces to receive Crash Rails. Notify the Architect in writing if wall surfaces are not acceptable. Do not begin installation until unacceptable conditions have been corrected.

3.02 INSTALLATION

- A. Install Crash Rails to walls securely in accordance with manufacturer's written instructions.
- B. Install Crash Rails accurately in location, alignment, and elevation.
- C. Provide horizontal steel stud back-up in drywall stud cavity to accept fasteners.