

TAC-WALL®

Transform walls, doors, partitions, panels, room dividers, and more into decorative and functional spaces quickly and economically with Tac-Wall. Tac-Wall is a colorful linoleum/ cork wallcovering that's self-healing, exceptionally resilient and resistant to cracking, drying, or peeling. Tac-Wall is biodegradable and hygienic, too. The natural quality of Tac-Wall inhibits contaminants for a low-maintenance tackable solution. **Tac-Wall makes it all OK.**

FEATURES & BENEFITS

- Resilient, self-healing, & flexible

 does not crack & crumble like
 traditional cork boards
- Long lasting, timeless, & strong
- Versatile & colorful
- Practical & easy
- Does not attract dust & has bacteriostatic properties
- Natural materials 91% (e.g. cork, linseed oil, jute) Recycled content 43%

SPECIFICATIONS

- Surface Finish: smooth, matte finish
- Colors: 15 Tackable Colors
- Backing: Jute / Burlap provides excellent adhesion and dimensional stability
- Width: 48 in. (I22 cm.) flexible rolls Length: ± 92 lineal ft. (29 m.)
- Approx. Weight: 8.22 lbs./yd2. (3.73 kg./m2.) Thickness: 0.25 in. (6 mm.)
- All Tac-Wall products meet the California Indoor Air Quality Specification (CA-IAQ 0I350)
- Noise Reduction Coefficient (NRC) is 0.10


THE POSSIBILITIES ARE ENDLESS WITH CUSTOM TAC-WALL SHAPES

Create a functional work of art that combines design and performance with Tac-Wall's custom solutions. Options include creating individual shapes or shape clusters, laseretching a logo or artwork directly on the surface, and more, that can be installed as a full wall application or a mural. Inspire users to unleash their best, most innovative ideas with Tac-Wall surface solutions.

Steps for Creating a Custom Design:

Step I – Submit Drawing
Step 2 – Quote Created
Step 3 – Customer Approval
Step 4 – Design Fabricated & Shipped

Get started on your custom Tac-Wall project by contacting your Koroseal Sales Representative or our Customer Service Team at **855.753.5474**.

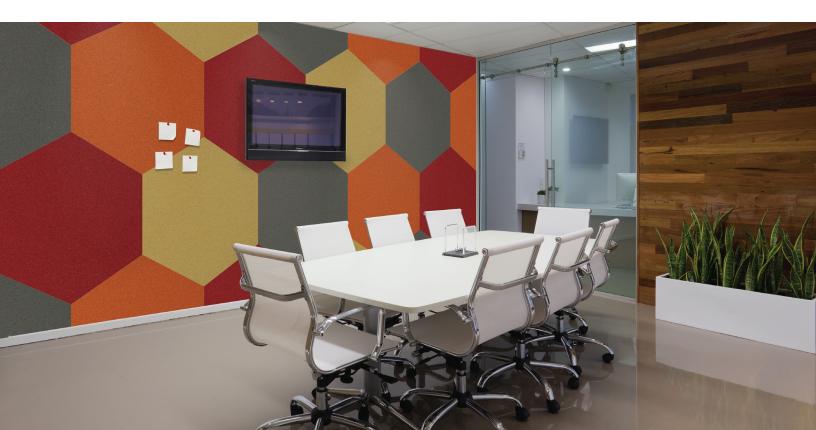



CUSTOM TAC-WALL SHAPES



koroseal.com | 855.753.5474