

COMFORT ZONE BEAM SPEC SHEET



SPECIFICATIONS:

Product Weight: 1.5 lbs/SF
Length: 4', 8'
Width: 2.75"
Height: 12", 16", 24"

FIRE RATING

Class A per ASTM E-84

ACOUSTICAL DATA

Based on Baffle size 4' x 2' with Type "J" Mounting. Sabins are based on Sabins per Object, NRC is an equivalent number based on one face of one panel

| Frequency (Hz) | 125 | 250 | 500 | 1000 | 2000 | 4000 | NRC |
|-----------------|-----|-----|------|------|------|------|------|
| 2.75" Thickness | .53 | .74 | 1.06 | 1.54 | 1.77 | 1.94 | 1.30 |

| Frequency (Hz) | 125 | 250 | 500 | 1000 | 2000 | 4000 | SABINS |
|-----------------|------|------|------|-------|-------|-------|--------|
| 2.75" Thickness | 2.94 | 4.45 | 7.05 | 10.62 | 12.61 | 13.64 | |

COMPOSITION

- ♦ 100% Polyethylene Terephthalate (PET)
- ♦ 55% recycled content


ENVIRONMENTAL FACTORS

- ♦ 100% recyclable
- ♦ Low VOC Emissions
- ♦ ASTM - D5116

INSTALLATION OPTIONS

Product can be installed with your choice of either aircraft cable or threaded rod attachments.

Aircraft Cable

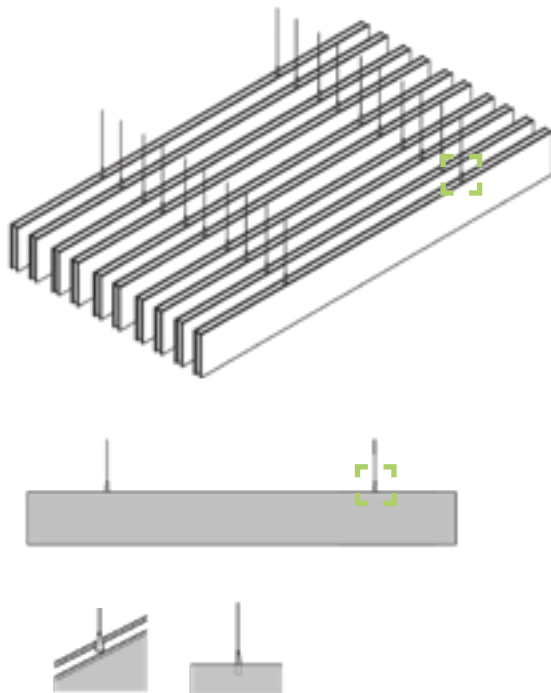

Threaded Rod Attachment

