

B100-SERIES BED LOCATORS


Korogard B100-Series Bed Locators are 3-1/2" (88.9mm) high rails with rounded full-length vinyl covers, continuous aluminum retainers, and locator caps. Bed locators position beds in a safe, damage-free space. All units are precut and drilled with locator ends attached at the factory.

Korogard B100-Series Bed Locators are backed by a limited five-year warranty. All Bed Locators are Class A fire rated and meet national building code standards. All Korogard linear profiles color-coordinate with a multitude of Koroseal Wallcoverings for a systems approach to wall protection.


For more information on Korogard Bumper Guards or the Koroseal Wall Protection System, please call your local Korogard distributor.

B100 SERIES ACCESSORY ITEMS

- B121** Bed Locator End Cap
- B103** 90° Outside Corner Cap
- B105** Splice Kit

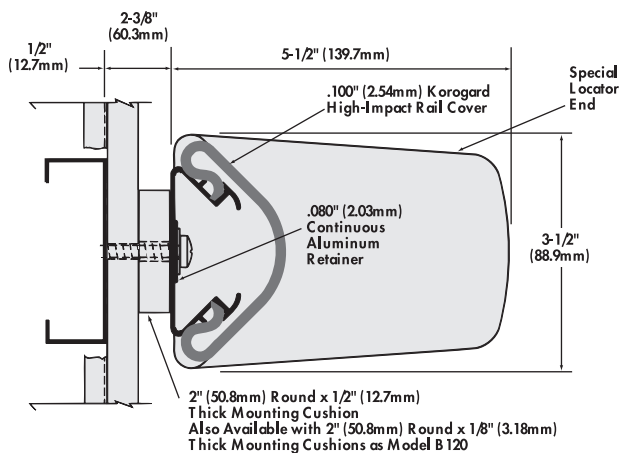

B130

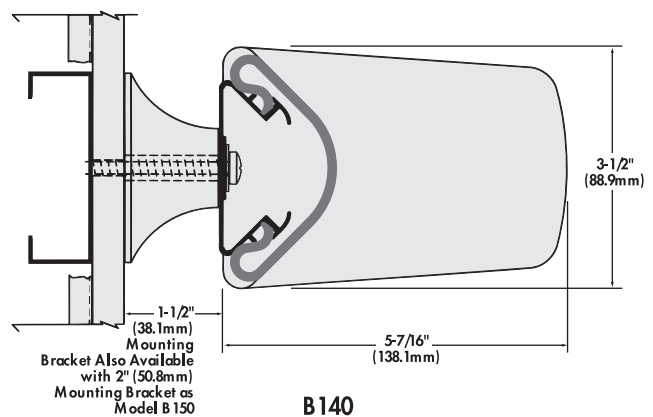

B140

SECTION 10 26 00 BED LOCATORS

PART 1 GENERAL

- 1.01 SECTION INCLUDES
3-1/2" (88.9mm) Bed Locators.
- 1.02 SUBMITTALS
A. Comply with requirements of Section 01 33 00—Submittals.
B. Product Data: Submit manufacturer's product data.
C. Shop Drawings: Submit shop drawings showing components, dimensions, and anchorage details.
D. Samples: Submit 12" (304.8mm) long sample of each model and color specified, including end caps and corner units, for Architect's approval.
E. Certification: Submit manufacturer's certification indicating compliance with applicable building code requirements.
- 1.03 QUALITY ASSURANCE
Comply with NFPA 101[®] for interior finish materials. Smoke developed less than 450 and flame spread of 25 or less in accordance with ASTM E 84.
- 1.04 DELIVERY, STORAGE, AND HANDLING
A. Delivery: Deliver materials to site in manufacturer's original, unopened containers and packaging with labels clearly indicating manufacturer and material.
B. Storage: Store materials indoors in a clean, dry area protected from damage and in accordance with manufacturer's instructions.
C. Handling: Protect materials during handling and installation to prevent damage.

PART 2 PRODUCTS

- 2.01 MANUFACTURER
Korosed Wall Protection Systems,
A Division of RJF International Corporation.

2.02 BED LOCATORS

- Korosed "Korogard" B100-Series Bed Locator: Bed Locator mounted over continuous aluminum retainer. Exposed surfaces shall be free of wrinkling, chipping, discoloration, or other imperfections.
1. Dimensions:
 - a. Height: 3-1/2" (88.9mm).
 - b. Width: 1-7/8" (47.6mm).
 - c. Clearance from Wall: [Model B120, 1/8" (3.18mm)] [Model B130, 1/2" (12.7mm)] [Model B140, 1-1/2" (38.1mm)] [Model B150, 2" (50.8mm)].
 2. Profile: High-impact vinyl acrylic extrusion locked in place, nominal 0.100" (2.54mm) thick. Class A fire rating, tested in accordance with ASTM E 84.
 3. Extrusion: Pebble grain finish. Contains EPA registered Micro-Chek antimicrobial agent.
 4. Retainer: Continuous 6063-T5 aluminum retainer along entire length of Bed Locator, nominal 0.080" (2.03mm) thick.
 5. End Caps: Injection molded, preassembled locator unit of color and texture similar to that of rail.

PART 3 EXECUTION

- 3.01 EXAMINATION
Inspect wall surfaces to receive Bed Locators. Notify the Architect in writing if wall surfaces are not acceptable. Do not begin installation until unacceptable conditions have been corrected.
- 3.02 INSTALLATION
A. Install Bed Locators to walls securely in accordance with manufacturer's written instructions.
B. Install Bed Locators accurately in location, alignment, and elevation.
C. Provide horizontal steel stud back-up in drywall stud cavity to accept fasteners.